



INSTRUCTIONS D'INSTALLATION EUROSCOPE

ÉTAPE 1 - Assemblage du rail lorsque le joint (splice) est inclus


1.

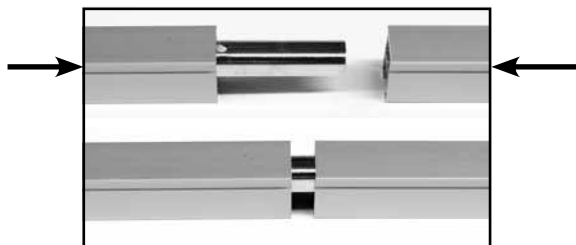

2. Center Support must be positioned on Splice for added strength.

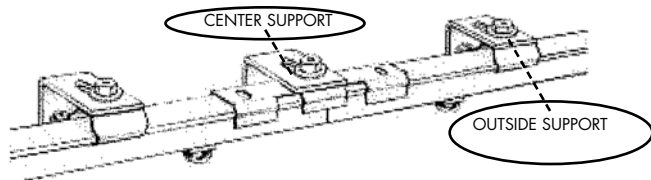

ÉTAPE 2 - Installation des supports


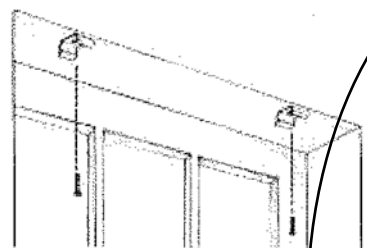


Step 2A. Inside mount

The outside Ceiling Clips should be installed 2" from the edge of the window frame. Space other Ceiling Clips equally between the outside clips. Ceiling Clips must be positioned in perfect alignment or the track will not install.

Step 2B. Outside mount


Center the track over the window opening at the desired height. Install the outside supports no more than 2" from the ends of the track. Make sure the supports are level.

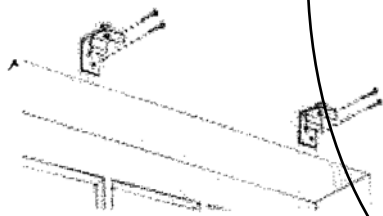

Step 2C. Extension supports


Install L-bars first, following the procedure of **Step 2B**. Attach Slider as shown in illustration.

ÉTAPE 3 - Installing the track

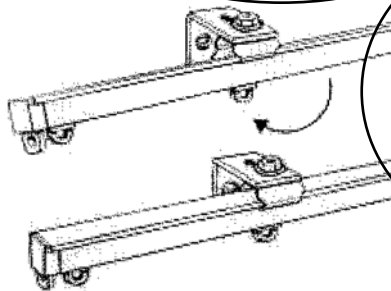

1. Place the front lip of the track into the front edge of the clip. Rotate the back of the track up into the clips and snap into place.

ÉTAPE 4 - Installing optional Fling Rod

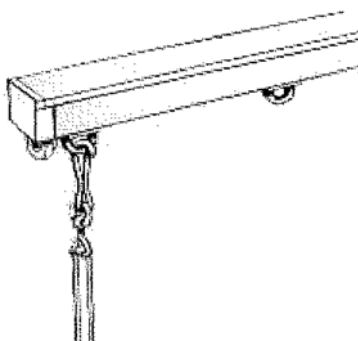

1. Place the Fling Rod on the side of the window you wish to operate from. Clip the Fling Rod into the end carrier.

2. USE PLASTIC PLUG TO LOCK FIRST CARRIER IN PLACE

ÉTAPE 5 - Installation de la poulie

Attachez la corde à la poulie. Étirez la poulie pour créer suffisamment de tension afin que la corde demeure dans le rail lorsque les rideaux sont ouverts. Ne mettez pas trop de tension. Tracez un point sur le mur ou le plancher avec un crayon. Enlevez les cordes et attachez la poulie au mur ou au plancher. Installez de nouveau les cordes.

• **LA POULIE DOIT ÊTRE INSTALLÉE. C'EST LA LOI. NE PAS S'Y CONFORMER PEUT ENTRAINER DES BLESSURES AUX ENFANTS ET AUX ANIMAUX.**

2. Si nécessaire, pour ajuster la corde, tirez la corde de la glissière principale jusqu'à ce que la poulie soit à la hauteur désirée. Tirez la corde de quelques pouces, faites un noeud et remettez en place.

