




STEP BY STEP INSTALLATION INSTRUCTIONS

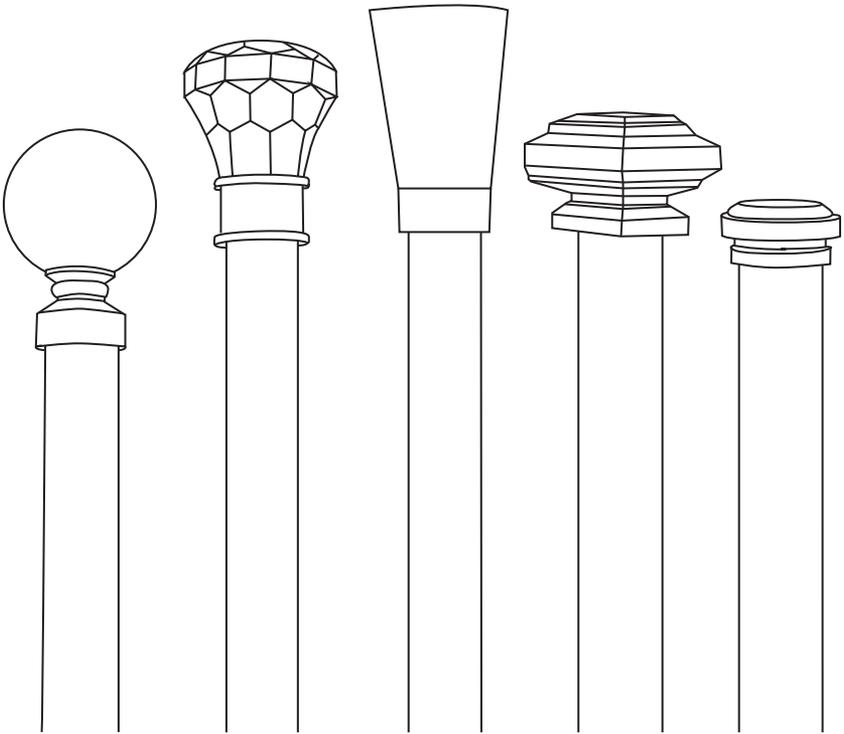

WALL MOUNT SIMPLICITIE ROD SET

Everything You Need For A Smooth Set-Up

We want you to love your new hardware and that includes having a smooth installation experience. We suggest saving this guide. If you encounter any difficulties or questions, please reach out to us for help. It's why we're here.

Call us at **1-800-361-4584** for more info on installation. Customer Service Hours - **Monday - Friday 9am - 4pm ET**

We recommend you hold on to all packaging until your hardware is fully installed. Should something go wrong (we strongly doubt it), we want any potential returns to be as painless as possible.

Getting Started

Before you begin, check the accompanying diagram to make sure you have all the parts you need . You'll need to make sure the surface you intend to install your hardware is sturdy enough to accommodate the brackets . If you're screwing directly into a surface this means locating wood studs that are strong enough to securely bond with the included screws. Otherwise, you'll need to use a secure fastener (as illustrated) but please note this piece is not included.

WALLBOARD OR PLASTER: Hollow wall applications:

Use a secure fastener designed specifically for this purpose.

METAL: Prepare by pre-drilling holes and then using the included screws.

CONCRETE, STONE, BRICK OR TILE: Use a masonry drill and surface-specific plugs, anchors, or screws.



MOLLY BOLT



SELF DRILLING ANCHOR



TOGGLE BOLT

When selecting a fastener, be sure it's designed to support the weight of the product being installed (if you're not sure, either give us a call or ask a professional at your local hardware store) . Once obtained, follow the fastener manufacturer's instructions regarding proper installation.


Tools You Will Need To Install Your Hardware:

Pencil, screwdriver, ¼ " nut driver, level, and a drill with a ¾," drill bit.


Note : It's important to monitor the amount of pressure you apply when using a drill. If the screws are too tight this may cause the screw itself to break off in the wall or window frame.




SCREWS




SUPPORT BRACKET



PENCIL & SCREWDRIVER (NOT INCLUDED)



DRILL AND LEVEL (NOT INCLUDED)



RING HOOKS

Step 1: Mounting the Supports





Choose desired height of your curtain rod. Once you have confirmed the proper height, use a pencil to mark the wall where the top of the rod is resting. Center the curtain rod over the window opening, and mark where the ends of each rod are positioned.

If you have a center bracket (included in curtain rods 72" and longer), mark the middle point between these two spots as well. Measure 3" from each end of the curtain rod and mark those spots. This is where the brackets will be installed.

Place bracket level against wall at the marked spots. Using a pencil, lightly draw circles where you will insert bracket screws.

If needed, drill holes and insert dry-wall anchors. Next, fasten the L brackets to the wall.

Place cradle brackets over L-brackets and secure with screw "A"

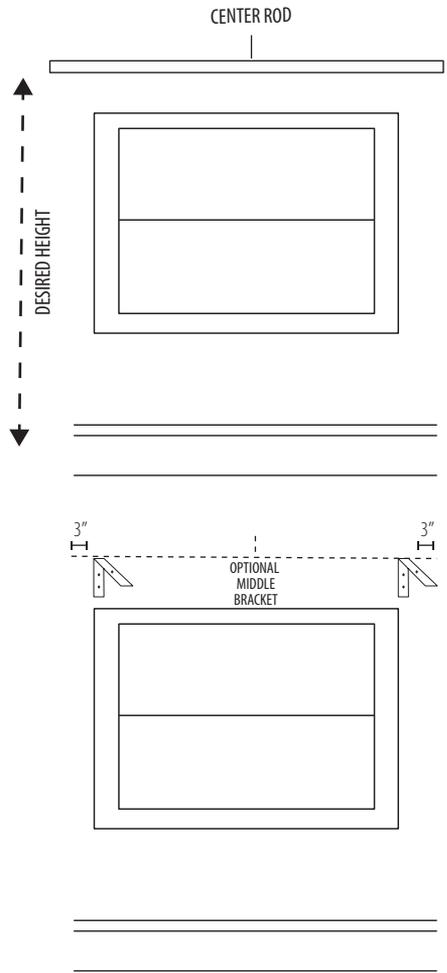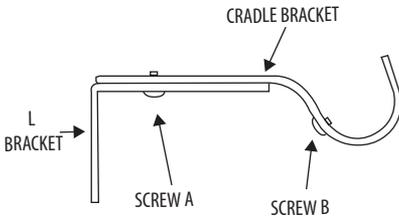

Step 2: Attaching the Rod Connector (for spliced curtain rods only)

Depending on your order, you may have received a rod connector. A rod connector is the short piece of metal tubing placed inside each end of the rods in a multi-segment system to join them together.

On the open end of one-rod segment, slide the connector halfway inside, leaving the other half exposed.

Slide the second rod segment over the exposed end of the connector, making sure there is no gap between the two segments.

Step 3: Attaching Rings and Finials

For treatments using rings and do not have a center support bracket:

For a one-way draw: Place all of the rings except for one, in between the two brackets. The last ring will be placed between the finial and bracket on the side you won't be opening curtain from.

For center-open draw: Place all of the rings except for two, in between the two brackets. The last two rings will be placed between the finial and brackets on each side of your curtain rod.

For treatments using rings and have a center support bracket

Center-open draw: Place all of the rings except for two, in between the two brackets split evenly on each side of the center bracket. The last two rings will be placed between the finial and brackets on each side of your curtain rod.


For treatments without rings

Position the drapery panels on the rod, and place the curtain rod on the supports.

Attaching Finials


To attach finials, place the finial on the rod and attach it using the set screw. (see photo 1)

For finials that come with a base screw, simply screw the finial into the nylon plug. (see photo 2)

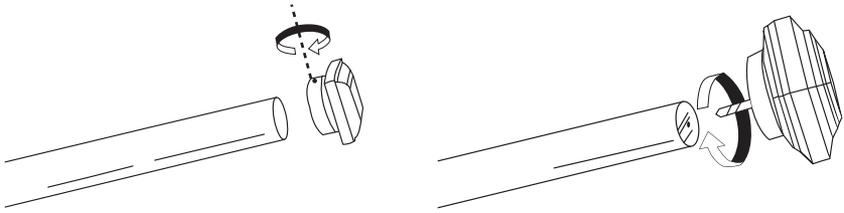

Step 4: Securing Rod to the Support Brackets

Once the rod has been placed on the brackets, secure the rod in place by tightening the bracket set screw "B"



Optional Accessory - Baton/Wand

After your hardware is installed, attach the baton's clip to the eyelet of the first ring.

